


## RFL-C2000SM-HP

High performance CW fiber laser  
Data sheet V 1.0

### Features

- » [P]erformance [L]evel [D]
- » Power redundancy
- » Profibus/Profinet/Ethernet/Devicenet
- » Anti high reflection
- » Intelligent self monitoring

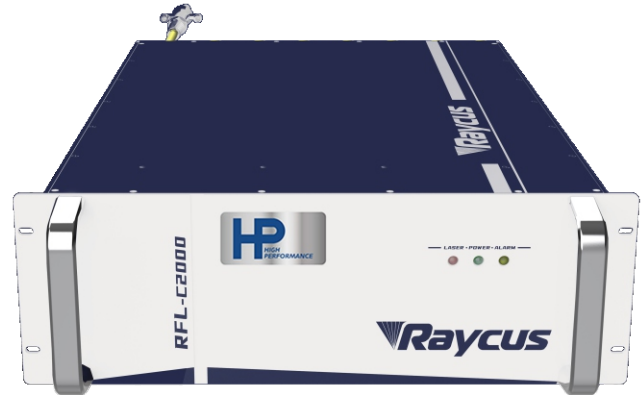

## TECHNICAL SPECIFICATIONS

Central wavelength	1075-1085 nm	Supply voltage	380V ± 15% AC
Output power	2000 W	Operation mode	CW/Modulate
Power instability	<1.5 %	Control mode (custom)	BUS,Ethernet,RS232,AD
Range of power	10-100 %	Dimensions	448x934x168 mm
Repetition frequency	1-5000 Hz	Weight	<50 kg
Beam quality	<1.2 M <sup>2</sup>	Operating temperature	10 - 40 °C
Terminal type	QBH (custom)	Storage temperature	-10 - 60 °C
Fiber length	10 m (custom)	Humidity	< 70 %
Fiber core	14 μm (custom)	Cooling methode	Water

# RFL-C2000SM-HP

