

CW-6260

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode

$\pm 0.5^{\circ}\text{C}$


Temperature
Stability




Features:

1. Temperature stability of $\pm 0.5^{\circ}\text{C}$;
2. Designed with multiple alarms & error display functions;
3. With CE, RoHS and REACH approval.

Cooling Performance

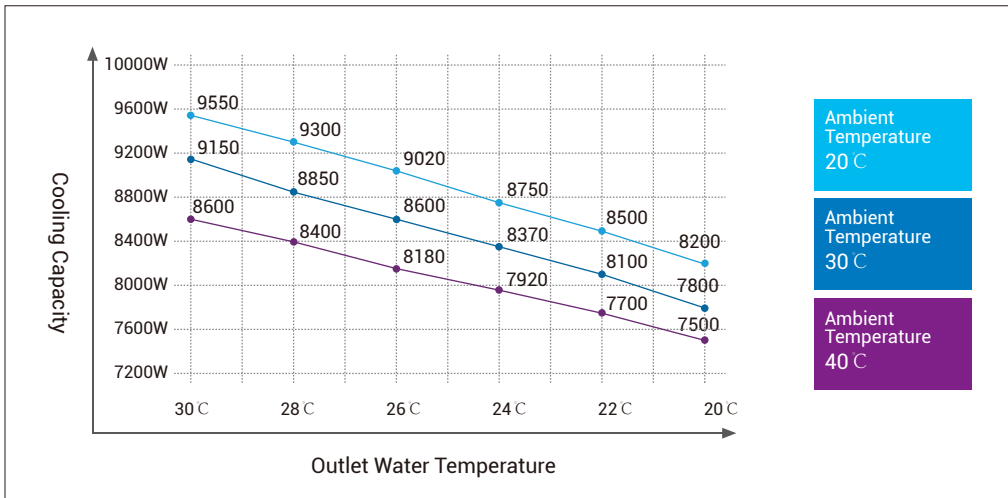

Pump Performance

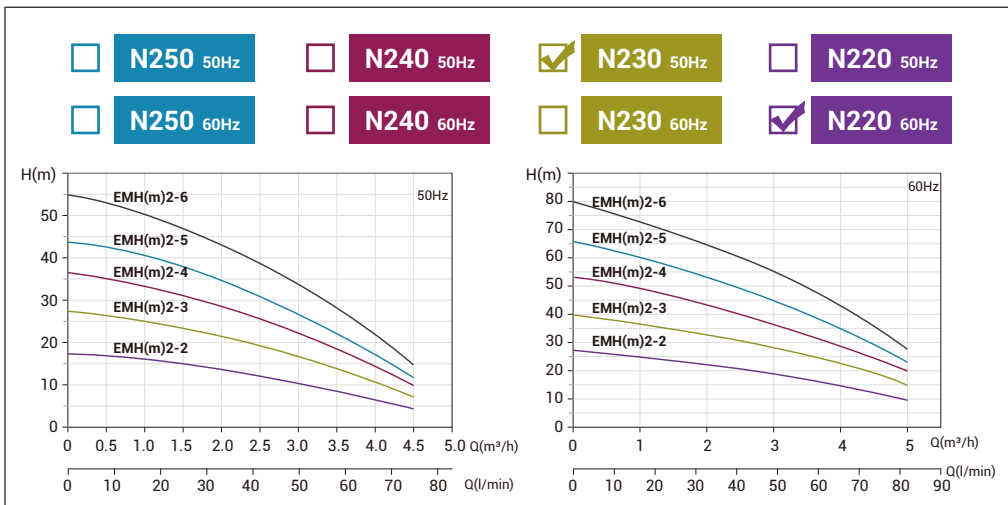


Technical Data:

Model	CW-6260ANTY230	CW-6260BNTY220
Voltage	AC 1P 220~240V	
Frequency	50Hz	60Hz
Current	3.4~21.6A	3.9~21.1A
Max. power consumption	4.3kW	4.4kW
Compressor power	2.76kW	2.72kW
	3.76HP	3.64HP
Nominal cooling capacity	27876Btu/h	28115Btu/h
	8.17kW	8.24kW
	7024Kcal/h	7085Kcal/h
Refrigerant	R-410a	
Pump power	0.37kW	
Max. pump pressure	27M	
Max. pump flow	75L/min	
Precision	±0.5°C	
Reducer	Capillary	
Tank capacity	22L	
Inlet and outlet	Rp1/2"	
N.W	95Kg	
G.W	111Kg	
Dimension	77 X 55 X 103 cm (L X W X H)	
Package dimension	78X 65X 117 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

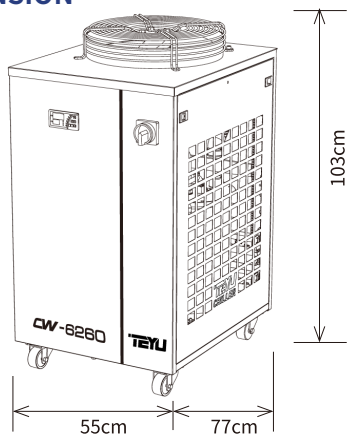

PACKAGE DIMENSION

