

# CW-6000

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature  
Control Mode

$\pm 0.5^{\circ}\text{C}$


Temperature  
Stability




## Features:

1. Temperature stability of  $\pm 0.5^{\circ}\text{C}$  ;
2. Designed with multiple alarms & error display functions;
3. With CE, RoHS and REACH approval.

## Cooling Performance

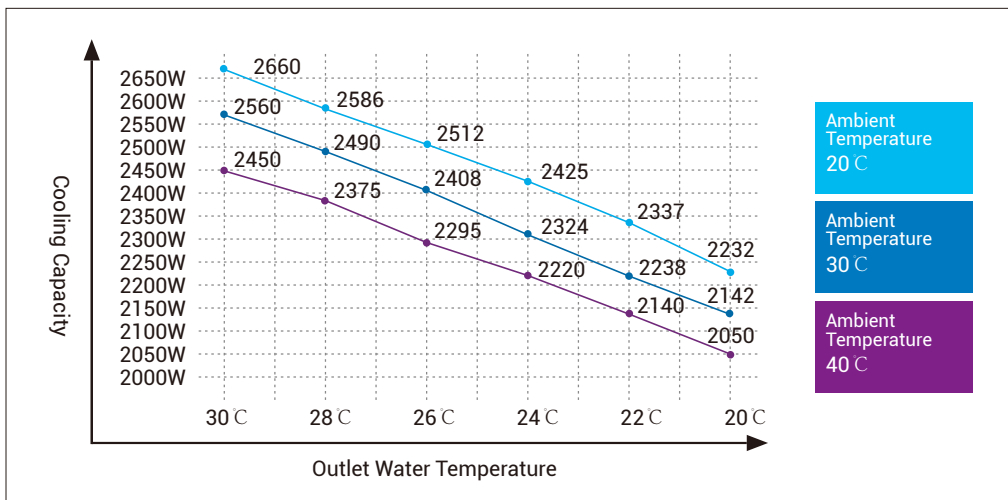

## Pump Performance

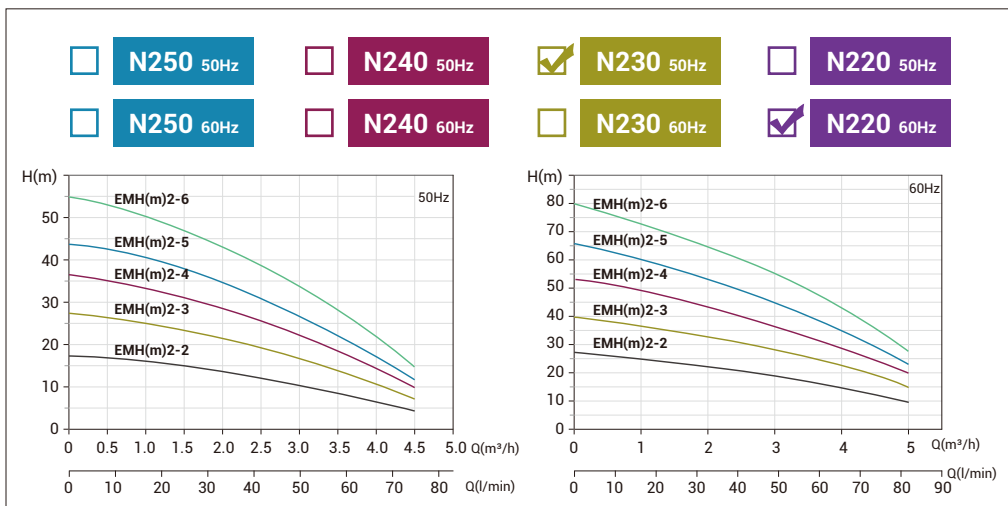


## Technical Data:

Model	CW-6000ANTY230	CW-6000BNTY220	CW-6000DNTY220
Voltage	AC 1P 220~240V		AC 1P 110V
Frequency	50Hz	60Hz	
Current	2.3~9A	2.1~8.2A	5.7~18.7A
Max. power consumption	1.26kW	1.25kW	1.36kW
Compressor power	1.11kW	1.08kW	1.19kW
	1.48 HP	1.44HP	1.59HP
Nominal cooling capacity	11160 Btu/h	10717 Btu/h	11775 Btu/h
	3.27kW	3.14kW	3.45kW
	2811 Kcal/h	2700 Kcal/h	2966 Kcal/h
Pump power	0.37 kW		
Max. pump pressure	27 M		
Max. pump flow	75L/min		
Refrigerant	R-410a		
Precision	±0.5°C		
Reducer	Capillary		
Tank capacity	14L		
Inlet and outlet	Rp1/2"		
N.W	57Kg	59Kg	63Kg
G.W	69Kg	71Kg	75Kg
Dimension	67 X 47 X 89 cm (L X W X H)		
Package dimension	73 X 57X 105 cm (L X W X H)		

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

### DIMENSION

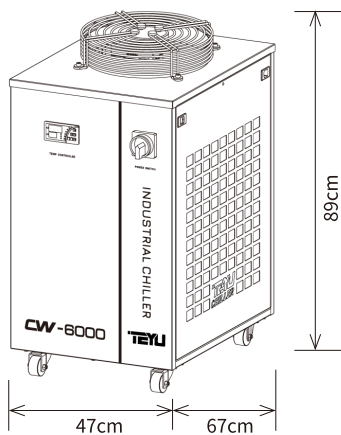

### PACKAGE DIMENSION

