



CW-5000

T-SERIES
INDUSTRIAL CHILLER




Professional Temperature Control




Features:

1. Temperature stability of $\pm 0.3^{\circ}\text{C}$;
2. Dual frequency power specification 220V 50/60Hz;
3. Constant & intelligent temperature control modes.

Cooling Performance

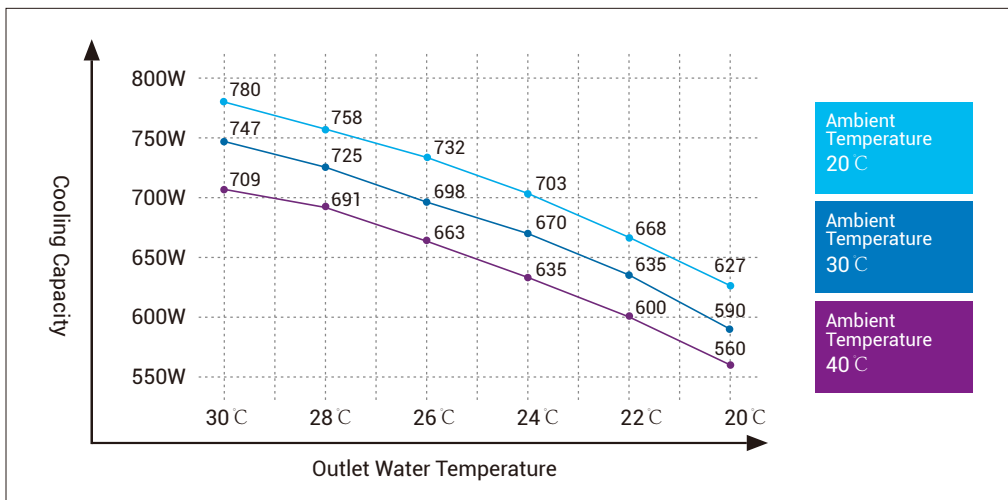

Pump Performance

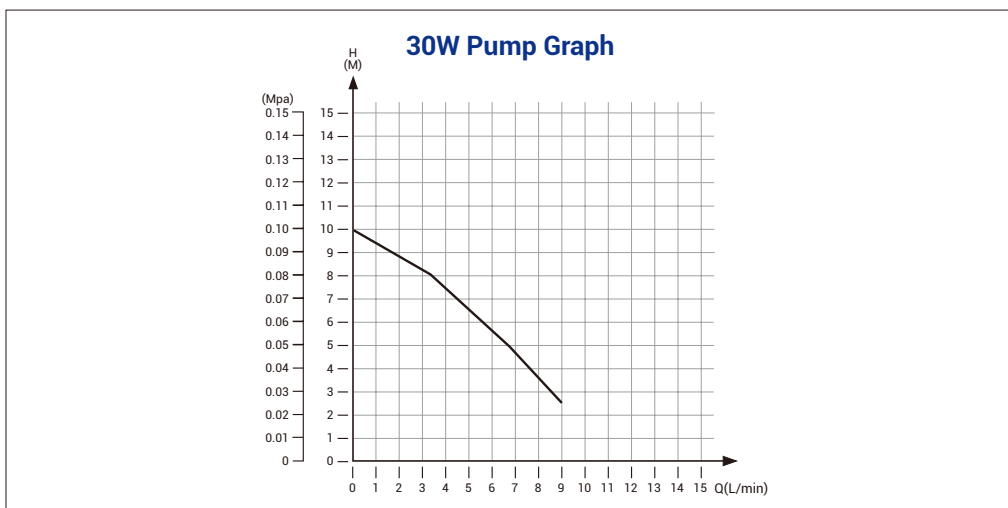


Technical Data:

Model	CW-5000TGTY	CW-5000DGTY
Voltage	AC 1P 220V~240V	AC 1P 110V
Frequency	50/60Hz	60Hz
Current	0.4~3.1 A	0.4~5.18A
Max. power consumption	0.44/0.46 kW	0.43 kW
Compressor power	0.37/0.39 kW	0.38 kW
	0.5/0.53 HP	0.51HP
Nominal cooling capacity	3037/3686 Btu/h	3514 Btu/h
	0.89/1.08 kW	1.03 kW
	765/928 Kcal/h	885 Kcal/h
Pump power	0.03kW	
Max. pump pressure	10M	
Max. pump flow	10L/min	
Refrigerant	R-134a	
Precision	±0.3°C	
Reducer	Capillary	
Tank capacity	6L	
Inlet and outlet	OD 10mm barbed connector	
N.W	20Kg	21Kg
G.W	23Kg	24Kg
Dimension	58 X 29 X 47 cm (L X W X H)	
Package dimension	65 X 36 X 51 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

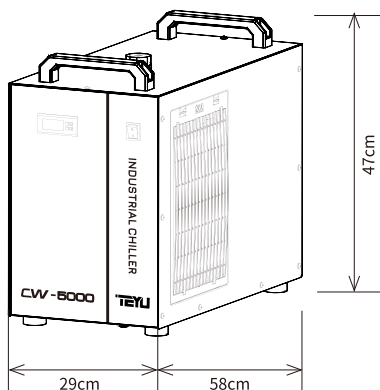

PACKAGE DIMENSION

